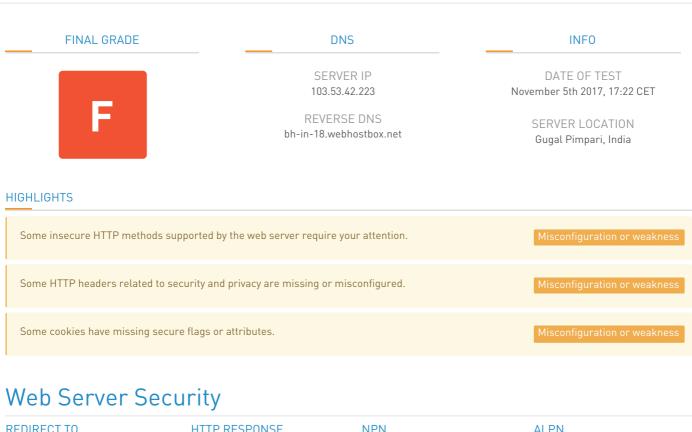# Content Security Policy and Security Headers Test of http://www.ientertain.in

Test your Content Security Policy (CSP), HTTP Security Headers and overall web server security.

Assessment of www.ientertain.in Executive Summary

FINAL GRADE	DNS	INFO
F	SERVER IP 103.53.42.223	DATE OF TEST November 5th 2017, 17:22 CET
	REVERSE DNS bh-in-18.webhostbox.net	SERVER LOCATION Gugal Pimpari, India

HIGHLIGHTS

Some insecure HTTP methods supported by the web server require your attention.	Misconfiguration or weakness
Some HTTP headers related to security and privacy are missing or misconfigured.	Misconfiguration or weakness
Some cookies have missing secure flags or attributes.	Misconfiguration or weakness

Web Server Security

REDIRECT TO	HTTP RESPONSE	NPN	ALPN
N/A	200 OK	N/A	No

CONTENT ENCODING	SERVER SIGNATURE	WAF	
None	Apache PhusionPassenger/4.0.1 0 modbwlimited/1.4	No WAF detected	

HTTP METHODS OVERVIEW

✓ GET ✓ POST ✓ HEAD ✓ OPTIONS ✓ DELETE ✓ PUT ✓ CUSTOM

HTTP Headers Security

SERVER ⓘ

The web server discloses its version. This may allow attackers to use known vulnerabilities and conduct further attacks against it.

Misconfiguration or weakness

Raw HTTP Header

Server: Apache Phusion_Passenger/4.0.10 mod_bwlimited/1.4

X-POWERED-BY ⓘ

The web server discloses its version. This may allow attackers to use known vulnerabilities and conduct further attacks against it.

Misconfiguration or weakness

Raw HTTP Header

X-Powered-By: PHP/5.4.45

X-FRAME-OPTIONS ⓘ

The header was not sent by the server.

Misconfiguration or weakness

X-XSS-PROTECTION ⓘ

The header was not sent by the server, enabling XSS exploitation if not restricted by the client's browser.

Misconfiguration or weakness

X-CONTENT-TYPE-OPTIONS ⓘ

The header was not sent by the server.

Misconfiguration or weakness

CONTENT-SECURITY-POLICY ⓘ

The header was not sent by the server.

Misconfiguration or weakness

Cookies Security

COOKIE: PHPSESSID

The cookie has neither Secure nor HttpOnly flags set, make sure it does not store sensitive information.

Misconfiguration or weakness

Raw HTTP Header

Set-Cookie: PHPSESSID=mjui0oov1jlv8n0fvjou7rcb75; path=/

Attributes

Name	Value	Description
path	/	Sets the path of the application where the cookie should be sent.